



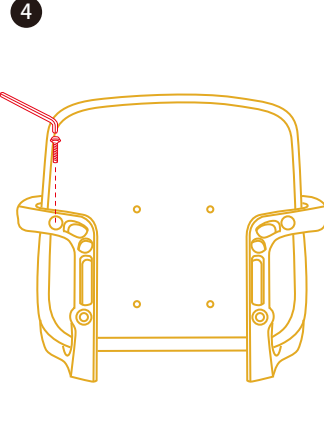
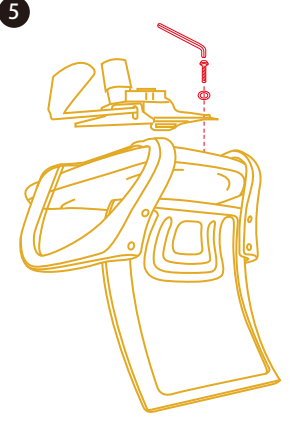


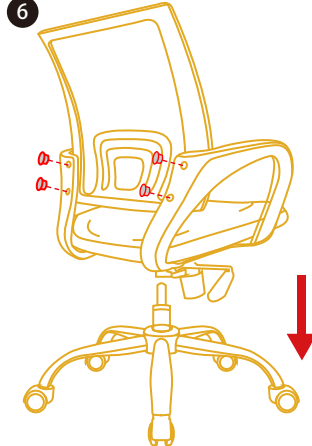

INSTRUCTION MANUAL

MODEL: CHR16


1 	2 	3 
Remove the Base Cover Install the Casters by firmly pressing them into the Base	Insert the Base Cover over the Top of the Base. Insert the Gaslift through the hole in the Base Cover	Attach the Armrests using the M6x25mm Armrest Screws
4 	5 	6 
Attach the Seat Cushion using the M6x30mm Seat Cushion Screws	Attach the Seat Plate using the M6x20mm Seat Plate Screws & Washers	Place the Seat Plate onto the Gas Lift and firmly press down Insert the Plastic Covers in the Holes on the Armrests

SAFETY WARNINGS







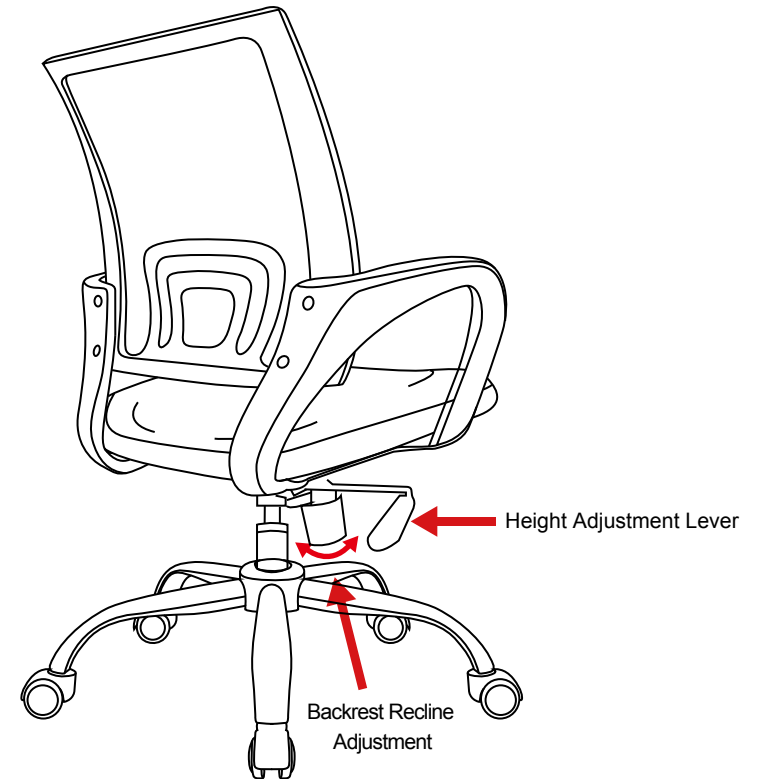









1. Maximum Weight Capacity is 300 lbs. Do not exceed.
2. Please read the instructions completely before assembly.
3. Confirm all parts are included in the carton before beginning assembly.
4. Do not use power tools to assemble the chair.
5. Do not stand on the chair.
6. Do not sit on the armrests.
7. Use on a flat floor.

For assistance call 1-855-994-3832 or visit www.sibrandssupport.com



PARTS LIST

			
Casters x5pcs	Base x1pc	Gas Lift x1pc	Armrests x2pcs
			
Seat Cushion x1pc	Backrest x1pc	Seat Plate x1pc	Allen Wrench x1pc
			
Washers x4 +1 extra pc	Base Cover x1pc	Plastic Covers x4pcs	M6x20mm x4 +1 extra pc
			
Armrest Screws M6x25mm x4 +1 extra pc	Seat Cushion Screws M6x30mm x4 +1 extra pc		
